

INSTRUCTIONS ON HOW TO CREATE A CORRECT FILE FOR WALLPAPER

The following guidelines are to help you generate a correct print file. Should you be in doubt, please consult our FAQ-section, activate the optional file check by an operator or call our service.

1 FILE FORMAT

Our systems only process PDF format files - not password protected.

2 COLOUR

The same colour can appear slightly different depending on the printing media. This is due to the material physical composition. All files must be sent in CMYK (cyan, magenta, yellow and black), and possibly assigning colour profile. Images in RGB or in PANTONE colours will be converted automatically to a standard separation profile.

3 RESOLUTION


File resolution to print wallpaper needs to be at least 72 dpi in a 1:1 scale. If you send the file in a different scale, be sure to make the resolution higher proportionally (e.g.: if your file scale is 1:2, set the resolution to 150).

4 EXTRA INFORMATION

The minimum printable point is 0,5.


5 MARGINS AND BLEED AREA

To print wallpaper, we ask for a PDF file with a 1mm bleed on each side (if the file has got a 1.1 scale) and no crop marks.

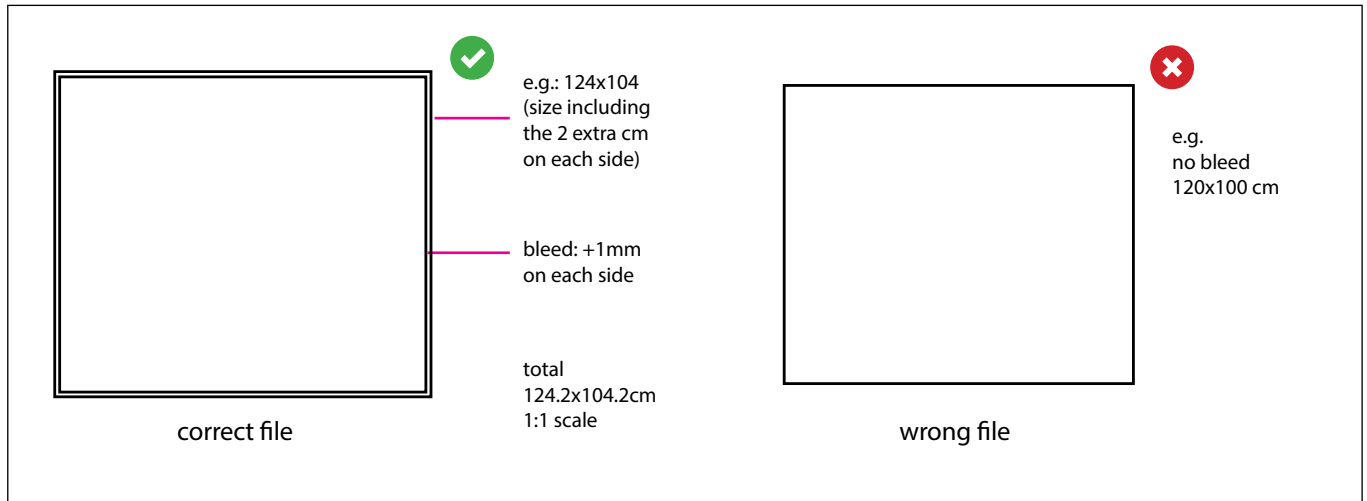

IMPORTANT! As you will have noticed when filling the quote form, we remind you that, to make the application easier, we recommend you to order the wallpaper with an extra 2cm on each side.


For example, if your wall measures 600x180, order 604x184 and add a 1mm to the print file, so that it will be 604.2x184.2



wall size 600x180cm




order size 604x184cm




file size 604.2x184.2cm

6 PANELS

We will provide the wallpaper in even wide vertical panels with no overlap, with maximum width of 100cm for each panel

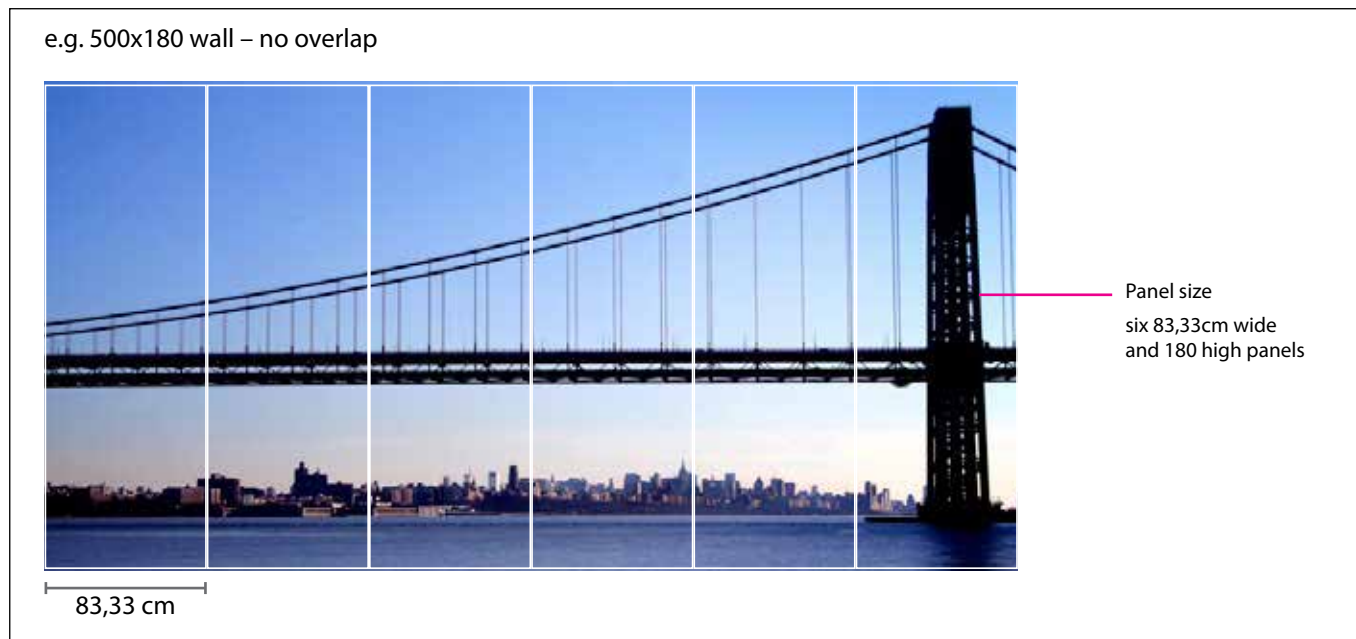


ASSEMBLY INSTRUCTIONS




- 1** Wall preparation
Before you start, make sure that the surface is dry, clean, absorbent and even.




- 2** Gluing
We recommend an adhesive such as Metylan segura in a 1kg every 10lt of water proportion.




- Apply the adhesive evenly on the surface and lay the wallpaper strips one by one, helping yourself with a roller. We recommend to apply the adhesive gradually to prevent it from drying too




- quickly: the best solution is to apply it just before each strip. Apply the wallpaper in a perfectly perpendicular way, helping yourself with a plumb-bob and some paper tape.




- 3** Application
Where the sides of the print do not overlap, make sure that they match perfectly from side to side.




- Remove the glue traces from the surface with a sponge or a damp cloth.



- 4** Finishes
Use a roller or a squeegee to make the paper even near the sides of the strips and to remove any bubbles.



- Bear in mind that for textured paper it is better to use a dry cloth in order not to flatten the texture. Press the corners and remove the extra bits.



- Once the job is done, clean the surface with a damp cloth to remove any trace of adhesive.